


**BS4232**

## 4 port RS-232 Isolated HUB

### 1、 Usage

1 to 4 port RS-232 isolated HUB (Model: BS4232) realizes isolation of 1 port RS-232 to 4 port RS-232. BS4232 makes RS-232 have multi-port communication function. BS4232 has 1 female DB-9 RS-232 and 4 male DB-9 RS-232, no software set, no power supply. Each RS-232 port of BS4232 has TXD、RXD、GND.

### 2、 Installation and performance

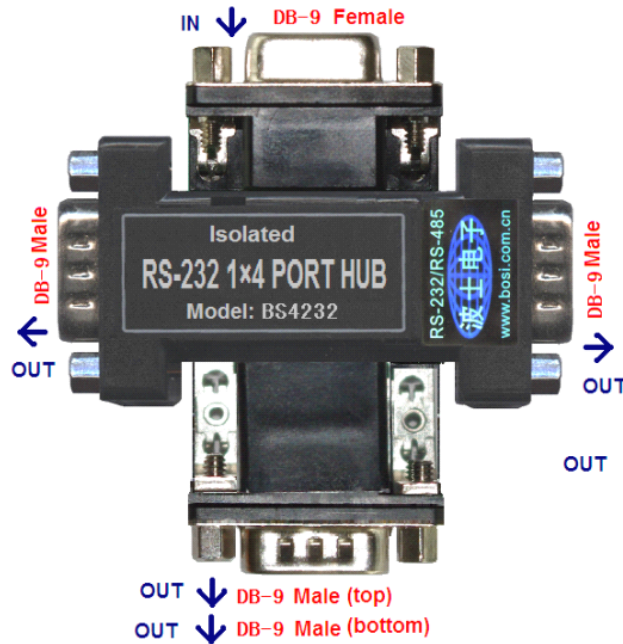

BS4232 appearance for db-9 (female)/db-9 (male) dongle size, as shown in figure. The up db-9 (female) RS-232 is directly plugged into computer's male db-9 RS - 232 serial port. The left db-9 (male), the right db-9 (male), and the down double db-9 (male) RS-232 ports are four isolated RS - 232 serial ports. BS4232 needs no external power supply!

This product needs not any initialization Settings! Only RXD , TXD , GND signals. BS4232 has isolation voltage 2500 v, highest communication baudrate 19200 BPS, actual up to 28.8 Kbps in short distance.

