

**SWT2232**


## All signal 2×2 port RS-232 SWITCH

### 1、 Usage

2×2 port all signal RS-232 SWITCH (Model: SWT2232) realizes communication of 2 port RS-232 to 2 port RS-232. SWT2232 makes RS-232 have multi-port communication function。 It has 2 female DB-9 RS-232 and 2 male DB-9 RS-232, no software set, no power supply。 Each RS-232 port of SWT2232 has all signal of TXD 、 RXD、 GND、 RTS、 CTS、 DTR、 DSR。

It is used for 1 to 2 RS-232 ports share 1 to 2 RS-232 ports.

### 2、 Installation and performance

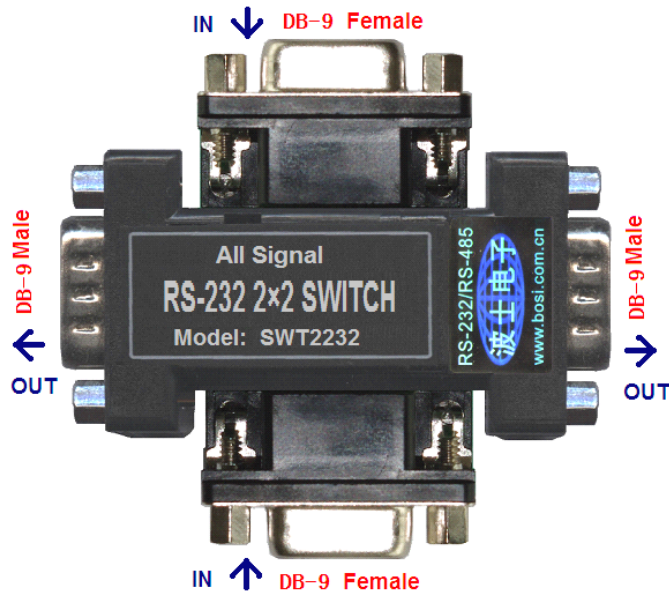

SWT2232 appearance for db-9 (female)/db-9 (male) dongle size, as shown in figure. The up db-9 (female) RS-232 and down db-9 (female) RS-232 can be directly plugged into computer's male db-9 RS - 232 serial ports. The left db-9 (male) and the right db-9 (male) ports are 2 switched RS-232 serial ports. SWT2232 needs no external power supply!

This product needs not any initialization Settings! All signals of RS-232. SWT2232 has highest communication baudrate 115200 bps.

