


SWT2232G

Isolated 2×2 port RS-232 SWITCH

1、 Usage

2×2 port RS-232 isolated SWITCH (Model: SWT2232G) is used for 1 to 2 RS-232 ports share 1 to 2 RS-232 ports with isolation. SWT2232G makes RS-232 have multi-port communication function. It has 2 female DB-9 RS-232 and isolated 2 male DB-9 RS-232, no software set、no power supply. Each RS-232 port of SWT2232G has TXD、RXD、GND.

2、 Installation and performance

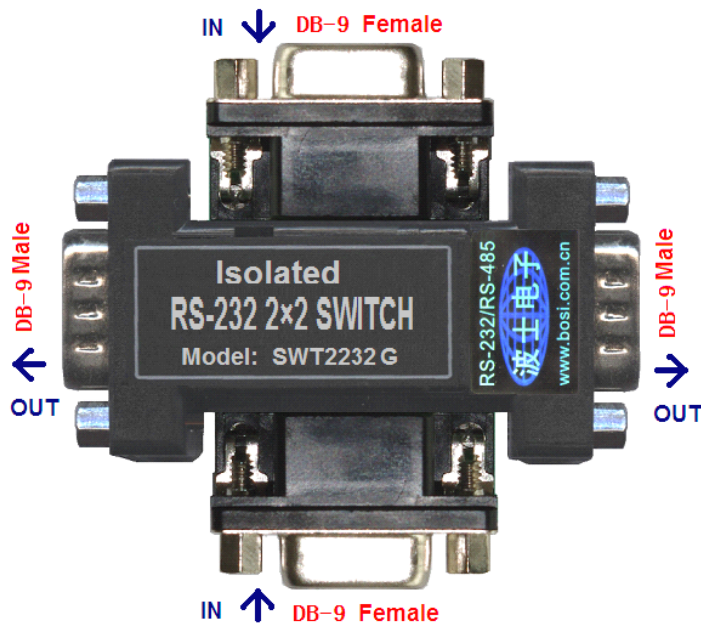

SWT2232G appearance for db-9 (female)/db-9 (male) dongle size, as shown in figure. The up db-9 (female) RS-232 and down db-9 (female) RS-232 can be directly plugged into computer's male db-9 RS - 232 serial ports. The left db-9 (male) and the right db-9 (male) ports are 2 isolated RS-232 serial ports. SWT2232G needs no external power supply!

This product needs not any initialization Settings! Only RXD , TXD , GND signals. SWT2232G has isolation voltage 2500 v, highest communication baudrate 19200 BPS, actual up to 28.8 Kbps in short distance.

